

# CERTIFICATES CERTIFICATES






















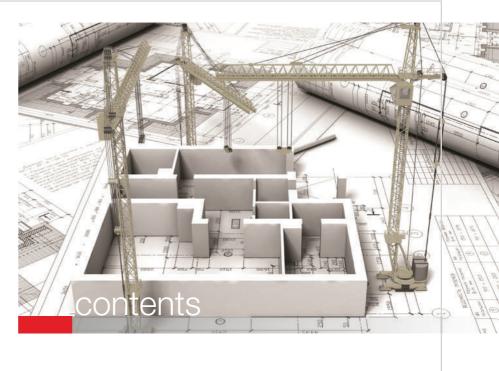


Hebe-Schiebe (Lift&Slide) System	02 - 03
Maxi Empire (Dutch) System 120 mm	04 - 05
Maxi Royal System 70 mm	06 - 07
Maxi Plus System 80 mm	08 - 09
Maxi Majestic (British) System 70 mm	10 - 11
Maxi Riviera (French) System 105-125-165 mm	12 - 13
Elegans System 70 mm	14
Elegans System 60 mm	15
Diamond System 60 mm	16
Bahar System 52 mm	16
Economical System 52 mm	17
Sliding Systems	18 - 19
PVC Window Board	20 - 21
Naturoll Roller Shutter, Commercial Access and	
Garage Door Systems	22 - 23
Color Chart	24
Quality Documents	25

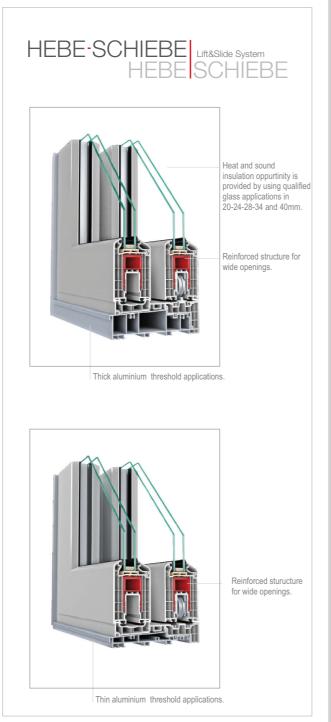


Aesthetical solutions and increase of the outside seeing ability for places such as balconies, terraces, verandas and winder gardens.

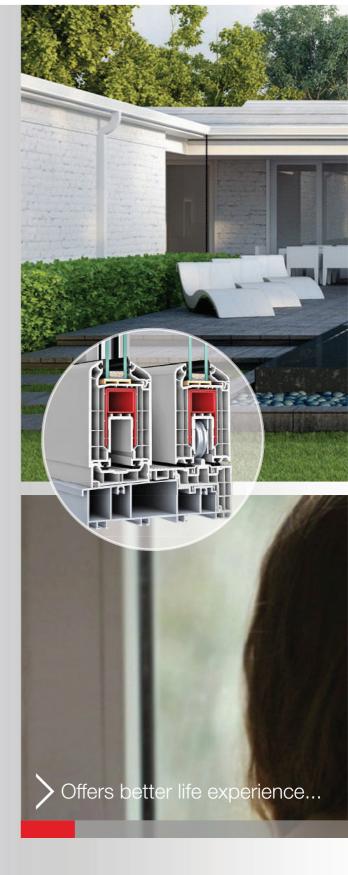









- 170 mm frame profile with 6 or 7 chambered option
- 70 mm sash profile with 5 chambered offers oppurtunity to use qualified glass with thickness 20-24-28-34 and 40mm.
- Frame and sash profiles wall tickness are in a class.
- PVC cover inside for aluminium threshold, in order to get heat insulation.
- Mounting screws stay under the auxiliary profiles; in order not to be visiable.
- Frame profile can be assambled in the mounting place; so that it can be transferred to the installation place easily.
- Thanks to the special rollform design reinforcement profile, the system offers wide openings; where the wind and inertia lasts are to high.
- Thanks to two gasket system to provide better value for heat, sound and water insulation.

UNLEADED

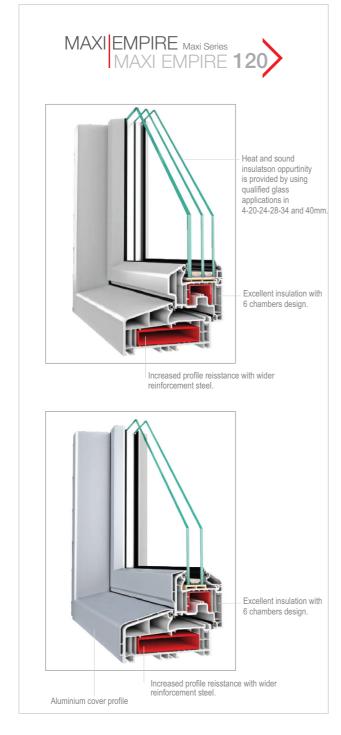

Offers best performance solutions for wide openings for places such as villas and high-rise buildings.











- Thanks to 120 mm frame profile with 5 chambered, which provides heat, sound, dust and water insulation, in order to get better comfort and providence.
- As an alternative to white profile; cream and grey profile options contributes aesthetic value to the buildings.
- Inclined outside surface design, in order to avoid holding water on the profile.
- Offers higher profile resistance with wider reinforcement profile option.
- With the simplicity and elegance; Maxi Empire Serie provides also excellent compatibility to the architecture from the buildings and better isolation above the expectations.
- Aluminium cover applications which help to find out alternative solitions for residential and commercial building.

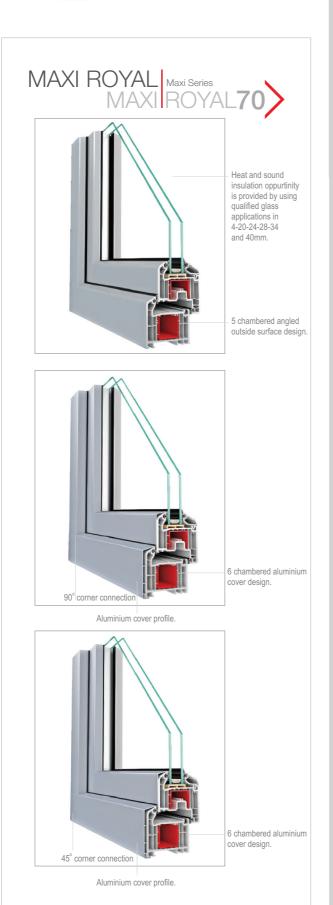


Designed for renovation applications from old buildings and new constructions, high rise residential and commercial buildings; with sufficient insulation and statical resistance features and different color possibilities.





M





- Provides heat and sound insulation oppurtinity by using qualified glass in 4-20-24-28-34 and 40mm.
- With an additional chamber and air wall; contributes better value to the window insulation.
- Provides better aesthetical design with aluminium cover application.
- Special design to provide better insulation along with PVC profile.
- Application profile with special design offers endless color options for external facade applications from residential and commercial buildings.















Heat and sound insulation oppurtinity is provided by using qualified glass applications in 4-20-24-28-34 and 40mm

Inclined 6 chambered outside surface design.

Angled surface accelerates the water flow.

Flat 70




6 chambered oval outside surface design.

Oval surface prevents water hold.

Oval 80








- Offers oppurtunity to use qualified glass in 4-20-24-28-34 and 40mm, in order to get maximum heat and sound insulation.
- Thanks to 80mm wide 6 chamber profile, which provides comfort and providence in high level.
- As an alternative to white profile; cream and grey profile options adds aesthetic value to the buildings.
- Inclined and oval outside surface design.











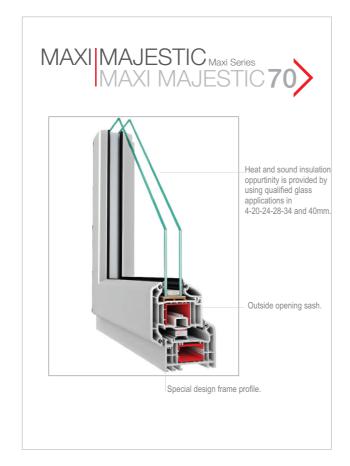

Maxi Majestic, which was inspired from United Kingdom, creates spacious and functional spaces without restricting interiour places by opening the sashes outside.

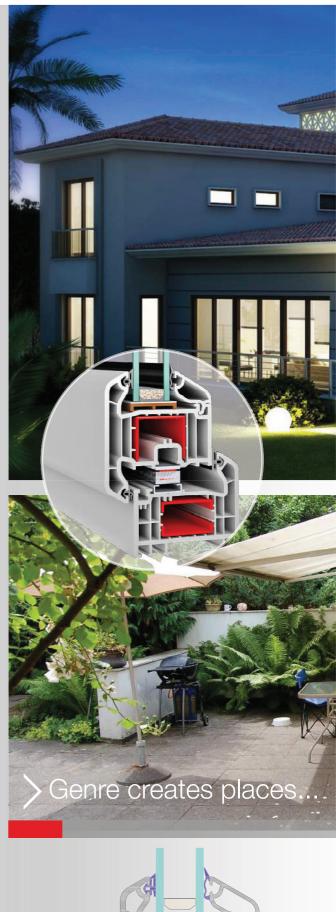












- Provides heat and sound insulation oppurtunity by using qualified glass in 4, 20, 24, 28, 34 and 40 mm.
- Thanks to specially designed frame, sash and mullion profiles; which provide outside opening window applications.
- For interiors, where there is no possibilşity to open windows inside, easily creating space and functional places with the help of excellent design.










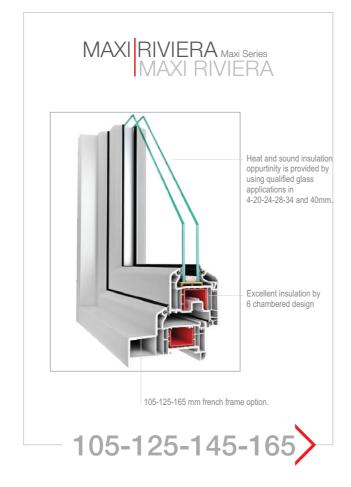

This system, which was inspired from France, contributes aesthetic to the places by French and renovation frame applications.

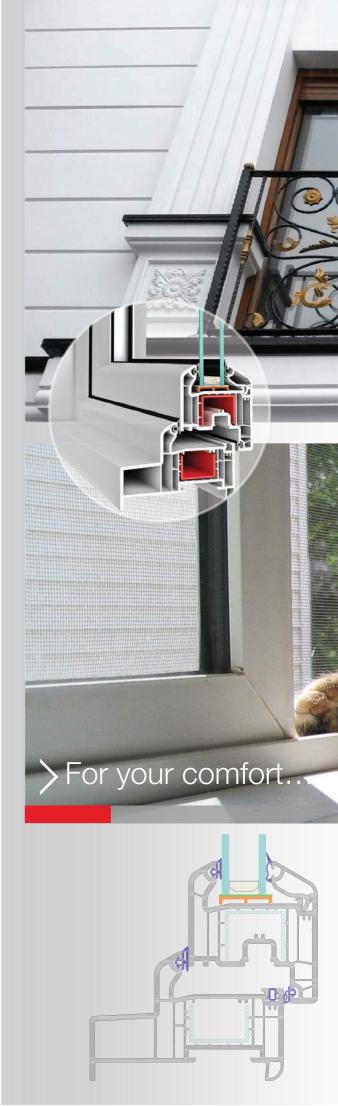







- Provides heat and sound insulation oppurtinity by using qualified glass in 4-20-24-28-34
- Enables double sash application with special adapter for French balcony doors.
- Besides standard frames, available for 105, 125, 145 and 165mm French frame options.
- In order to provide aesthetic view, application with narrow sash and adapter profiles.












Indispensable alternatives for residence and apartments projects.

Offers economy and high quality together all over the world.


- Offers different shape of glazing bead oppurtunities with 5 chamber design, heat and souns insulation with qualified glass applications in 4, 20, 24, 28, 34 and 40mm.
- Due to the flat external figure; the system has a satiated looking; and adifferent design with the angled water drainage reservoir.
- Offers several alternative solutions for renovation.
- Offers economy and high quality together for residential projects.

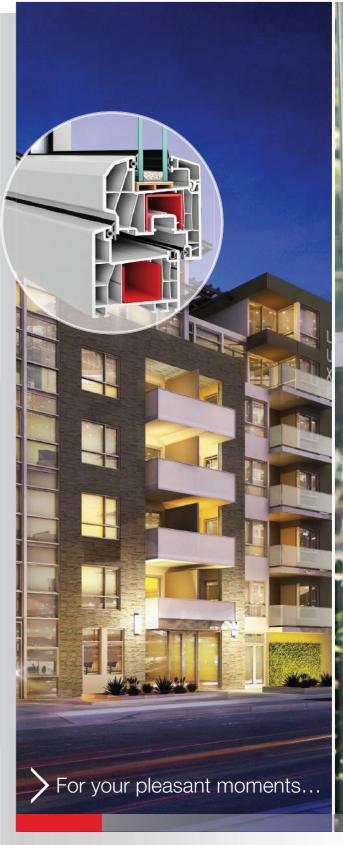



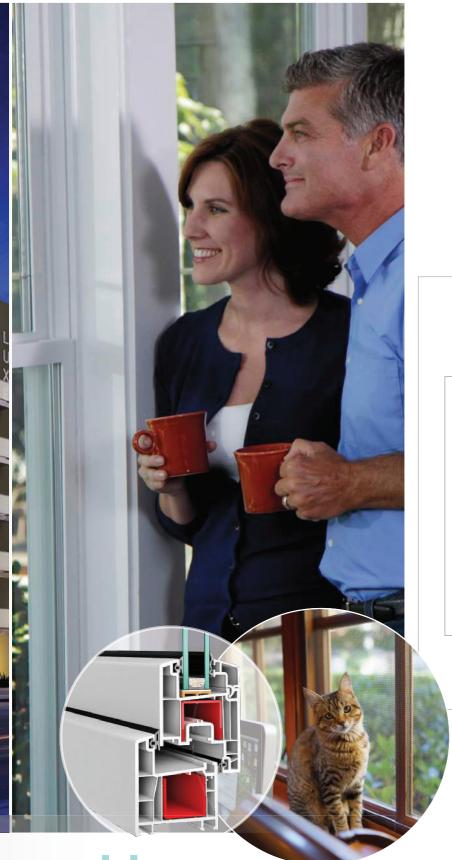





Heat and sound insulation oppurtinity is provided by using qualified glass applications in 4-20-24 and 30mm.

A different design with 4 chambered profile with angled water drainage

Flat external figure with satiated looking.


- Heat and sound isolation with 4 chambered design is provided by using qualified glass applications in 4-20-24 and 30mm and the system offers different shape of glazing bead oppurtunities.
- Due to the flat external figure; the system has a satiated looking; and adifferent design with the angled water drainage reservoir.
- Offers several alternative solutions for renovation.
- Offers economy and high quality together for residential projects.










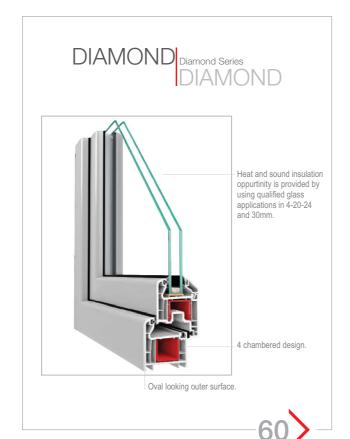










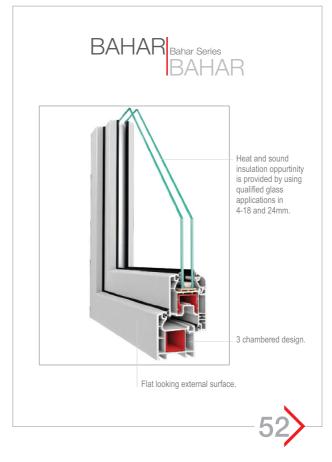

- 52mm profile with 3 chambered with optional 4,18 and 24 mm qualified glass.
- As the system is an economical system, it is a preference reason for countries, who meet the PVC system very new.
- Possibility for outside opening sash application is the most important reason for the use of the system.



The power of the system has been approved under very heavy climate conditions.



- Diamond serie 60mm 4 chambered
- Provides heat and sound insulation opportunity by using qualified glass in 4-20-24 and 30 mm for 60 mm series.
- Several alternative product possibilities for renovation.










# CLASSICAL Classical Sliding CLASSICAL




Heat and sound insulation oppurtinity is provided by using qualified glass applications in 4-20-24 and 30mm.

Offers wide openings with 3 sash application.

Reinflorced sashes with special rollformed steel profiles.



# CLASSICAL Classical Sliding CLASSICAL




Reinforced sashes with special roll formed steel profiles

2 rails frame profile












# COMPACT Compact Sliding COMPACT







Narrow aesthetical sash profile.

Sliding with fly

• Spacious and wide spaces can be created with sliding door and window applications.

offer better spacious view ability.

• The system provides space saving with the sashes, which can be slided in their axis instead of opening.

Sliding series can be applied as window and door; with two, three and four sash combinations and

- Special design for water flow without any obstacle.
- Frame and mullion offer sectional sliding frame.
- Offers fly screen application for all sliding frames.
- · Heat and sound insulation oppurtinity for 7400 sliding system is provided by using qualified glass applications in 4-20-24 and 30mm.
- Heat and sound insulation oppurtinity for 7460 sliding system is provided by using qualified glass applications in 4 and 20mm.












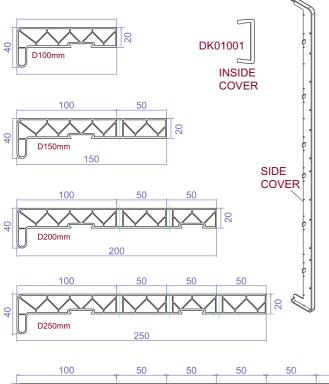












D600mm 606



Can be used in one par tor sectional parts in 100 -150 - 200 - 250 - 300 - 350 - 400 - 450 - 500 - 600 MM. It is an alternative solution instead of marble window sill.

- Excellent high resistance solution for heat insulation and against condensation.
- Provides ease of application for wide surfaces and structure shapes.
- Aesthetical and durable decorative products.









### **NATUROLL**













Rollformed Aluminium Slats With Polyurethane.













# COLOR CHART COLOR CHART

### STANDARD COLOR



WALNUT V 92178007



DARK OAK FL-F1 92052089



GOLDEN OAK 92178001



MAHOGANY (NON-STANDARD) 92097013



ANTHRACITE GREY 701605-116700

CREAM 49113

### NON STANDARD COLOR



ALUMINIUM BRUSH 9.1298702 - 119501



BRONZE PLATIN 9.1293714 - 119501



DARK GREEN 612505 - 116700



DARK RED 308105 - 116700



QUARZGRAU 703905 - 116700



RUSTIC CHERY 9.3214007 - 119500



SCHOKOBROWN 887505 - 116700



STAHLBLAU 515005 - 116700



WINCHESTER XC 9.0049252 - 114800



WISCONSIN XD 90033223 - 114800



Besides the wide product range, VERATEC will continue to be a indispensable choice due to the wide color range, which shows architectural richness through color compatibility and completeness.